



Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.

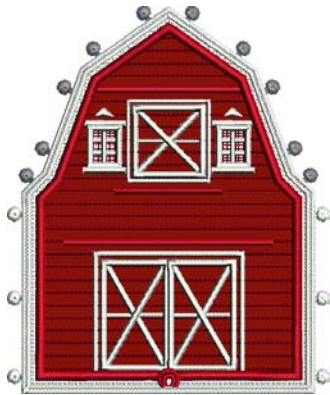


**12596-01 Front Wall FSA**

4.76 X 5.72 in.  
120.90 X 145.29 mm  
28,632 St. ⚡ ⚙ L

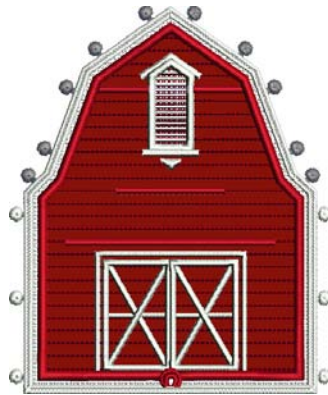


**12596-02 Back Wall FSA**

4.76 X 5.72 in.  
120.90 X 145.29 mm  
27,191 St. ⚡ ⚙ L

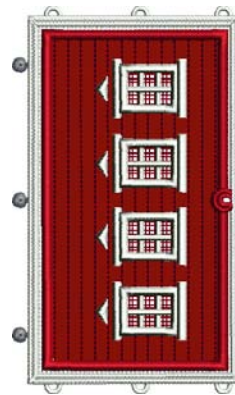


**12596-03 Side Walls FSA**

3.21 X 5.45 in.  
81.53 X 138.43 mm  
22,708 St. ⚡ ⚙ L

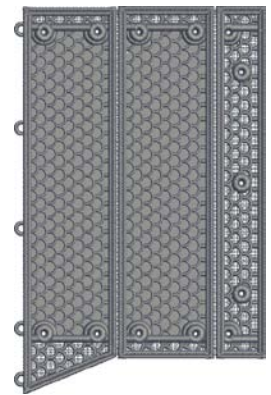


**12596-04 Right Roof FSA**

4.29 X 6.63 in.  
108.97 X 168.40 mm  
54,688 St. ⚡ ⚙ L

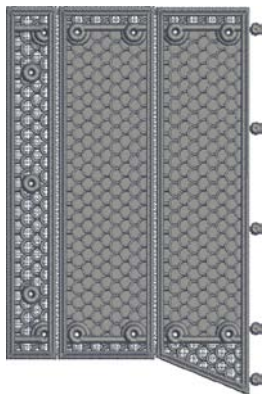

**12596-05 Left Roof FSA**

4.36 X 6.63 in.  
110.74 X 168.40 mm  
54,384 St. ⚡ ⚙ L

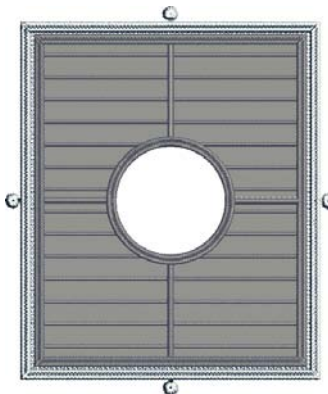

**12596-06 Floor FSA**

4.77 X 5.61 in.  
121.16 X 142.49 mm  
24,932 St. ⚡ ⚙ L

⚡ Design contains a loose fill.

⚙ Some solid areas shown are not stitched.

L Design is larger than 5" (127 mm) in either direction.

S Design is smaller than 1.5" (38.1 mm) in either direction.

It is a violation of Copyright law to make and distribute copies of electronic designs or artwork.

Electronic designs are licensed to the original purchaser for use at one location. ©2015 OESD, LLC. All rights reserved.



# Freestanding Barn

#12596 / 1 Design

Listings below indicate color sample, stitching order and suggested thread color number. Most numbers indicate Isacord thread. Colors beginning with 20501 refer to YLI Fine Metallics, 7 refer to Yenmet Metallic, 8 refer to YLI Variations Variegated Thread and 9 refer to Isacord Multicolor Variegated.

### 12596-01 Front Wall FSA

■ 1. Placement Stitch .....	2123
■ 2. Cut Line & Tackdown .....	2123
■ 3. Windows & Siding .....	2123
■ 4. Roof Buttonettes .....	1874
□ 5. White Detail .....	0015
■ 6. Red Detail .....	1913

### 12596-02 Back Wall FSA

■ 1. Placement Stitch .....	2123
■ 2. Cut Line & Tackdown .....	2123
■ 3. Vent & Siding .....	2123
■ 4. Roof Buttonettes .....	1874
□ 5. White Detail .....	0015
■ 6. Red Detail .....	1913

### 12596-03 Side Walls FSA

■ 1. Placement Stitch .....	2123
■ 2. Cut Line & Tackdown .....	2123
■ 3. Windows & Siding .....	2123
■ 4. Roof Buttonettes .....	1874
□ 5. White Detail .....	0015
■ 6. Red Detail .....	1913

### 12596-04 Right Roof FSA

■ 1. Placement Stitch .....	0152
■ 2. Cut Line & Tackdown .....	0152
■ 3. Light Gray Lace .....	0152
■ 4. Dark Gray Lace .....	1874

### 12596-05 Left Roof FSA

■ 1. Placement Stitch .....	0152
■ 2. Cut Line & Tackdown .....	0152
■ 3. Light Gray Lace .....	0152
■ 4. Dark Gray Lace .....	1874

### 12596-06 Floor FSA

□ 1. Placement Stitch .....	0015
□ 2. Cut Line & Tackdown .....	0015
□ 3. White Detail .....	0015
■ 4. Dark Gray Detail .....	1874

**Isacord Thread Colors Used in “Freestanding Barn”**

Collection #12596

0015 White	1913 Cherry
0152 Dolphin	2123 Bordeaux
1874 Pewter	

### General Freestanding Appliqué Guidelines

#### Supplies:

##### Embroidery Thread:

- Use the same embroidery thread in the bobbin as the needle.

##### Needles:

- Use an Organ 80/12 Titanium needle for extended needle life.

##### Stabilizer:

- Use water-soluble stabilizer or film water-soluble stabilizer.




#### General Appliqué Instructions

1. Hoop two layers of water-soluble stabilizer.
2. Attach the hoop to the machine and select the design of your choice.
3. Stitch the Placement Stitch. **Photo 1**
4. Place a piece of appliqué fabric over the Placement Stitch so that it is completely covered.
5. Stitch the Cut Line & Tackdown Stitch.
6. Carefully cut away the excess appliqué fabric. **Photo 2**
7. Stitch the remainder of the design and repeat for any remaining pieces. **Photo 3**
8. Remove the hoop from the machine and the design from the hoop.
9. Trim excess stabilizer from the design.
10. Rinse away remaining stabilizer and allow it to dry.

#### Handy Hints

##### For 3D Appliqué Projects:

- Adhere 2 layers of heavy weight stabilizer to the back of fabrics with temporary adhesive spray **BEFORE** hooping or placing down for tackdown and cut in place. This gives fabric a more rigid structure.
- A pair of tweezers, hemostats, stiletto or a tiny crochet hook can be extremely helpful when inserting the buttonettes into the eyelets. (See **Diagram 1** for explanation of “buttonette” and “eyelet”.)
- Insert the tip of the tweezers, hemostats or crochet hook into the eyelet, grasp the buttonette and pull through the eyelet. Or a stiletto could be used to push the buttonette through the eyelet.

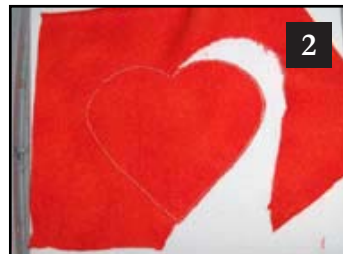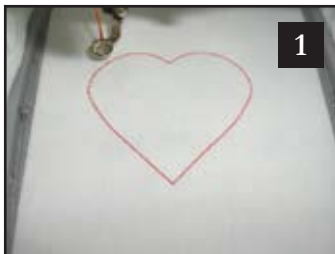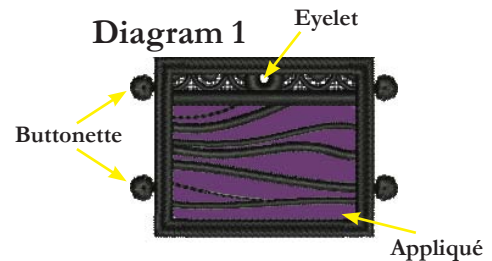

Life is good on the farm, and the traditional red barn is an iconic reminder of simpler times in the country. Get away from the hustle and bustle of the everyday embroidery and discover this rustic freestanding structure brought to you by the innovative folks at OESD. The bold contrast between the red fabrics and the white stitching offer a dynamic creation sure to bring nostalgia to any part of your home décor. You cannot deny the relevant red scheme, but we're betting you have fantastic color ideas of your own to sew this one in.

### Freestanding Barn – Summary

Requires 1 Front Wall FSA – 12596-01

Requires 1 Back Wall FSA – 12596-02

Requires 2 Side Walls FSA – 12596-03

Requires 1 Right Roof FSA – 12596-04

Requires 1 Left Roof FSA – 12596-05

Requires 1 Floor FSA – 12596-06

### Supplies

- Isacord embroidery thread
- Fabric for applique (red for barn walls and gray for roof and floor)
- Wash away stabilizer
- Embroidery machine
- *Optional* - Alligator clamps, tweezers, hemostats, stiletto or a tiny crochet hook

Follow the *General Freestanding Appliqué Guidelines* to stitch the required pieces as listed in the summary above for the barn.

### Build a Barn

- Attach the Front Wall FSA (12596-01) to a Side Walls FSA (12596-03) by inserting the three buttonettes along the left side into the three eyelets on the right side. Continue attaching the remaining Side Walls FSA (12596-03) and Back Wall FSA (12596-02) pieces together in the same manner. Attach the remaining side of the back wall to the side wall to form a rectangle.

#### PHOTO 1

- Attach the Right Roof FSA (12596-04) to the Left Roof FSA (12596-05) by inserting the buttonettes into the corresponding eyelets of the roof piece. **PHOTO 2**
- Place the roof piece on top of the barn walls and attach by pulling the buttonettes along the walls into the corresponding eyelets on the roof pieces. **PHOTO 3**
- Attach the Floor FSA (12596-06) by inserting the buttonettes of the foundation into the eyelets along the bottom of the barn walls. **PHOTO 4**
- Your Barn is complete.



Photo 1



Photo 2




Photo 3



Photo 4