







#### **Isacord Thread Colors**

0941 Golden Grain

1010 Toast 1233 Pony

0015 White 1252 Dark Tan 0131 Smoke 1355 Fox

0221 Light Brass 2510 Roseate

0352 Marsh 2830 Wild Iris 0454 Olive Drab 3410 Rich Blue

0520 Daffodil 3620 Marine Blue

0552 Flax 3652 Baby Blue

0622 Star Gold 4430 Island Waters 0873 Stone

Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.

### Stabilizers

- OESD StabilStick CutAway
- OESD Applique Fuse and Fix
- OESD StabilStick Template Sheets
- OESD StitcH2O WashAway Topping

#### Fabrics/Textiles

- Quilter's Cotton assorted colors
- · Zip up sweatshirt

#### Notions & Tools

- OESD Perfect Scoring Tool
- OESD Perfect Embroidery Press Cloth
- OESD Grippy GRID
- Embroidery Needle Ballpoint 80/12

#### **Isacord Thread Colors**

• Per the thread chart

SUMMARY





Embroidery Hoop to accommodate:  $5.96" \times 8.06"$ Finished project size:  $11.58" \text{ W} \times 7.58" \text{ H}$ 












The applique instructions included in the collection are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown. Fabric and thread requirements will vary by design, but the general technique is the same.

**Note:** Some thread colors in instructions have been changed or digitally enhanced for better visibility.


Instructions use designs 12961-11 and 12961-12.

#### STEP 1

- Print the mirrored version of the templates (at 100% scale or 1:1 ratio) onto the paper side of Applique Fuse and Fix.
- Cut approximately 1/4" 1/2" outside the printed applique templates.




- Cut the applique fabric 1/4"-1/2" larger than the applique templates.
- Fuse the trimmed templates to the back of the applique fabric with the paper side of the printed template up.
- Hold the iron on the template for 10-15 seconds for a secure fuse.






#### STEP 3

- Trim the applique fabric on the edge of the black outline.
- Set aside.



#### STEP 4

- Print the designs on StabilStick Template Sheets.
- Trim template sheets approximately 1" outside the design.



#### STEP 5

- Use the StabilStick Templates to audition design placement.
- · Peel the paper backing from the template.
- Align and place templates.

Tip: Save the paper to put the template back onto. Templates are reusable.

Tip: Press the template on clothes to remove excess tackiness.





#### STEP 6

- Hoop one layer of StabilStick CutAway paper (shiny) side up.
- Use the OESD Perfect Scoring Tool to score the paper.
- Remove the paper to reveal the adhesive surface.



#### STEP 7

- Load selected design into the machine.
- Example design is 12961-11.
- · Thread the machine per the thread chart.
- Place the hoop on the machine.
- Stitch Machine Step 1, Zipper Placement Line.



- Remove the hoop from the machine, but NOT the project from the hoop.
- · Place the hoop on a flat surface.
- Place the sweatshirt on the StabilStick aligning the edge of the zipper with the Zipper Placement Line stitching.
- Align the centering stitches on the stabilizer with the template.
- Finger press to secure.





#### STEP 9

- · Return the hoop to the machine.
- Use machine placement features to verify design placement with the template.

IMPORTANT: Gently remove the template before stitching. DO NOT STITCH THROUGH THE TEMPLATE.



#### **STEP 10**

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Cover the design area with StitcH2O WashAway Topping.
- Tape in place to secure.



- Return the hoop to the machine.
- Stitch the Machine Steps 2 and 3 per the thread chart.





#### **STEP 12**

 Stitch Machine Step 4, Yellow Fabric Placement Stitch.



- Remove the hoop from the machine, but NOT the project from the hoop.
- · Place the hoop on a flat surface.
- On the back of the prepared applique fabric, score and remove the paper backing to reveal the adhesive surface.
- Place the applique within the placement stitch.
- Finger press to secure.
  Tip: Applique Fuse and Fix is repositionable.





#### **STEP 14**

- Return the hoop to the machine.
- · Stitch the remaining steps per the thread chart.
- When the design is complete, remove the hoop from the machine.
- · Place the hoop on a flat surface.
- Gently tear away the excess wash away topping.
  Any remaining topping will wash away when the project is laundered.
- Remove the project from the hoop and trim the stabilizer 1/4"- 1/2" outside the design.
- Press right side down on a Perfect Embroidery Press Cloth.



- Load the mirrored design into the machine.
- Example design is 12961-12.
- Repeat the process for the other side of the sweatshirt.
- The project is complete. Enjoy!




### PRINTING INSTRUCTIONS



#### **ATTENTION**

When printing this document, any page scaling or page fitting options in your print dialog box must be turned OFF or set to NONE so that your files will print out at their actual size. Images not printed at actual size will not function as intended.

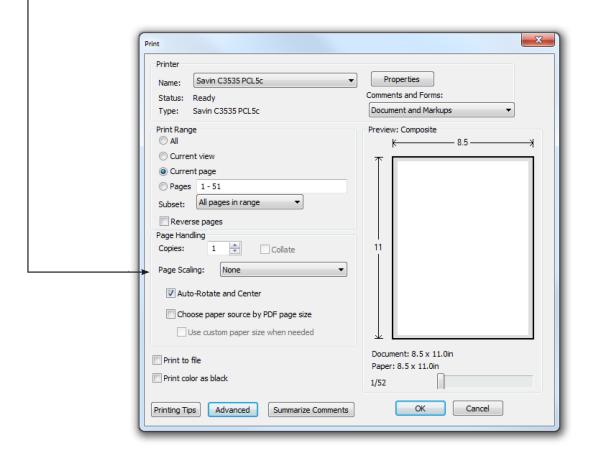

#### **TO SAVE PAPER**

Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image.

