

#51334 5 DESIGNS/10 FILES

Ornament Gift Card Holders



It is a violation of Copyright law to make and distribute copies of electronic designs or artwork. Electronic designs are licensed to the original purchaser for use at one location. ©2023 OESD, LLC. All rights reserved.

MATERIALS



Isacord Thread Colors

OO2O Black
O1O1 Eggshell
O124 Fieldstone
O5O4 Mimosa
O741 Wheat
18O5 Strawberry
21O1 Country Red
5326 Evergreen
5415 Irish Green
5531 Pear
5743 Asparagus

Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.

MATERIALS



- OESD AquaMesh WashAway
- OESD BadgeMaster WashAway
- OESD StabilStick CutAway
- OESD Fiber Form
- OESD Applique Fuse and Fix

Fabrics/Textiles

- OESD Luxe Sparkle Vinyl Dark Green
- OESD Luxe Sparkle Vinyl Red
- OESD Luxe Sparkle Vinyl White
- OESD Luxe Sparkle Vinyl Silver
- OESD Luxe Sparkle Vinyl Gold

Notion & Tools

- OESD Alligator Clamps
- OESD Perfect Scoring Tool
- OESD Expert Embroidery Tape TearAway
- OESD Expert Embroidery Tape WashAway
- OESD Perfect Punch Tool

Isacord Thread Colors

• Per the thread chart

- Quilter's Cotton assorted colors
- 1/4" ribbon for hanging

- OESD Mini MAT
- OESD Perfect Embroidery Press Cloth
- OESD Grippy GRID
- Embroidery Needle Sharp 75/11



SUMMARY

STATES STATES

0. 1111380 677



1




THE ACT

Embroidery Hoop to accommodate: 5.96" x 3.78"



SUMMARY



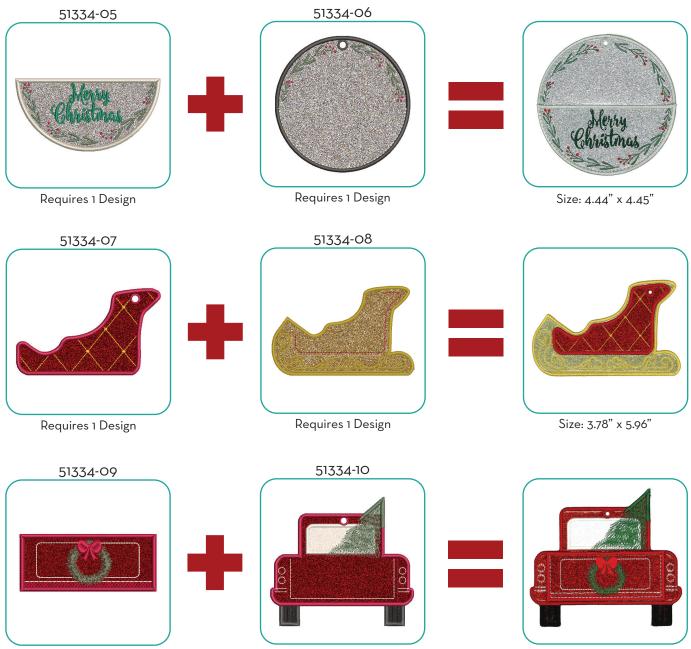

1.4

1993 BILLIO

Requires 1 Design

Requires 1 Design

Size: 4.63" x 5.20"

EMBROIDERY - PREP



General Instructions


The applique instructions, included in the collection, are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown.

Fabric and thread requirements will vary by design, but the general technique is the same.


Note: Some thread colors in instructions have been changed or digitally enhanced for better visibility.

Step 1

- Adhere one layer of StabilStick CutAway to the wrong side of all applique vinyl and fabric, to provide stiffness to the finished project.
- Cut the prepared applique vinyl 1/4"-1/2" larger than the templates that are included at the end of the instructions.

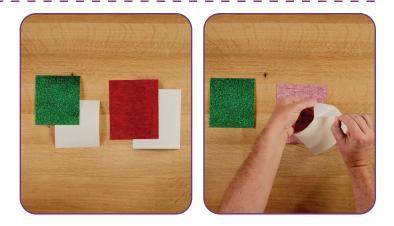

- Print the mirrored version of the templates (at 100% scale or 1:1 ratio) onto the paper side of Applique Fuse and Fix.
- Cut approximately 1/4" 1/2" outside the printed applique templates.





EMBROIDERY - PREP



Step 3

- For designs: 51334-02, 51334-04, 51334-06, 51334-08, and 51334-10, cut the Fiber Form 1/4"-1/2" larger than the applique templates.
- Fuse the trimmed templates to the back of the Fiber Form with the paper side of the printed template up. Hold the iron on the template for 10-15 seconds for a secure fuse.



Step 4

- Trim the Fiber Form on the edge of the black outline.
- Set aside.



Designs: 51334-01, 51334-03, 51334-05, 51334-07, and 51334-09

Step 5


 Hoop one layer of AquaMesh and one layer of BadgeMaster for all designs.

Step 6

- Load selected design into the machine.
- Example design is 51334-03.
- Thread the machine per the thread chart.
- Place the hoop on the machine.
- Stitch Machine Step 1, White Sparkle Vinyl Placement Stitch.

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Completely cover the placement stitch with the prepared vinyl.
- Tape in place to secure.









Step 8

Step 9

- Return the hoop to the machine.
- Stitch Machine Step 2, Cut Line and Tackdown.

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Trim the excess vinyl as close to the cut line stitching as possible.
- **Note:** If the outermost stitches (cut line) are cut, the inner stitches (tackdown) will hold the applique in place.
- Tip: If the stabilizer is cut or a hole is created while trimming the fabric, use OESD Expert Embroidery Tape WashAway as a patch.

Step 10

- Return the hoop to the machine and stitch the remaining steps per the thread chart.
- Match the bobbin thread to the upper thread.







Step 11

• When the design is complete, remove the project from the hoop and trim the stabilizer 1/4" - 1/2" outside the design.



Step 12

- Rinse in warm running water until all traces of the wash away stabilizers are removed. Completely and thoroughly rinsing will prevent this design from sticking to its corresponding design.
- Place right side down on a non-stick surface to dry. Using parchment paper or a cooling rack work well to prevent curling. Dry completely.
- Once dry, press right side down on a Perfect Embroidery Press Cloth.
- Note: Designs: 51334-01, 51334-03, 51334-05, 51334-07, and 51334-09 must be rinsed, dried, and pressed prior to attaching to its corresponding design.



Designs: 51334-02, 51334-04, 51334-06, 51334-08, and 51334-10

Step 13

 Hoop one layer of AquaMesh and one layer of BadgeMaster for all designs.

- Load selected design into the machine.
- Example design is 51334-04.
- Thread the machine per the thread chart.
- Place the hoop on the machine.
- Stitch Machine Step 1, Fiber Form Placement Stitch.



- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- On the back of the Fiber Form, score and remove the paper backing to reveal the adhesive surface.
- Place the Fiber Form within the placement stitching.
- Finger press to secure.











Step 16

- Return the hoop to the machine.
- Stitch Machine Step 2, Fiber Form Cut Line and Tackdown.



• Stitch Machine Step 3, Red Sparkle Vinyl Placement Stitch.



- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Completely cover the placement stitch with the prepared vinyl.
- Tape in place to secure.









Step 19

Step 20

- Return the hoop to the machine.
- Stitch Machine Step 4, Cut Line and Tackdown.

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Trim the excess vinyl as close to the cut line stitching as possible.
- **Note:** If the outermost stitches (cut line) are cut, the inner stitches (tackdown) will hold the applique in place.
- Tip: If the stabilizer is cut or a hole is created while trimming the fabric, use OESD Expert Embroidery Tape WashAway as a patch.

- Return the hoop to the machine.
- Stitch Machine Step 5, Green Sparkle Vinyl Placement Stitch.









Step 22

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Completely cover the placement stitch with the prepared vinyl.
- Tape in place to secure.

Step 23

- Return the hoop to the machine.
- Stitch Machine Step 6, Cut Line and Tackdown.

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Trim the excess vinyl as close to the cut line stitching as possible.









Step 25

- Turn the hoop over and place the prepared applique fabric, right side up, completely covering the design.
- Carefully tape to secure.
- Tip: Avoid pushing too hard on the stabilizer to prevent it from dislodging from the hoop.



Step 26

- Return the hoop to the machine.
- Stitch Machine Step 7, Back Fabric Cut Line and Tackdown.



Step 27

- Remove the hoop from the machine, but NOT the project from the hoop.
- Turn the hoop over and trim the excess fabric as close to the cut line as possible.



15

It is a violation of Copyright law to make and distribute copies of electronic designs or artwork. Electronic designs are licensed to the original purchaser for use at one location. ©2023 OESD, LLC. All rights reserved.

Step 28

- Return the hoop to the machine.
- Stitch the machine steps 8–11 per the thread chart with matching bobbin thread.

Step 29

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Place the stitched pocket, right side up.
- Aligned with the Mitten Fingers Pocket Placement Guide.
- Tape in place to secure.

- Return the hoop to the machine.
- Stitch Machine Step 12, Mitten Fingers Pocket Tackdown.









Cissortail STITCHES PREMIER COLLECTION

Step 31

• When the design is complete, remove the project from the hoop and trim the stabilizer 1/4" - 1/2" outside the design.



- Rinse in warm running water until the design is only slightly tacky.
- Place right side down on a non-stick surface to dry. Using parchment paper or a cooling rack work well to prevent curling.
- Once dry, press right side down on a Perfect Embroidery Press Cloth.



FINISHING TOUCHES



Step 33

- Use the OESD Mini MAT and Punch Tool with the 3mm attachment to create the eyelets indicated in the diagram.
- Tip: Take care to not cut the satin stitching.
- Reference the Punch Tool Guide on page 19.



Step 34

- Use the OESD Alligator Clamps to insert and fasten the ribbon for hanging.
- The project is complete. Enjoy!



PUNCH TOOL GUIDES



51334-02

115

STATE 1 19859

51334-04

RANA


SUL DUNNINGS SUCCESSION


N

100.00

51334-06








51334-07

51334-10

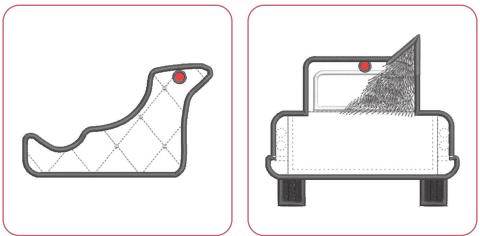



PRINTING INSTRUCTIONS



ATTENTION When printing this document, any page scaling or page fitting options in your print dialog box must be turned OFF or set to NONE so that your files will print out at their actual size. Images not printed at actual size will not function as intended. - 57 Print Printer Properties Savin C3535 PCL5c Name: Comments and Forms: Status: Ready Document and Markups Type: Savin C3535 PCL5c Print Range Preview: Composite 8.5 Current view Ourrent page Pages 1 - 51 All pages in range -Subset: Reverse pages Page Handling 11 Conies: 1 + Collate None Page Scaling: Auto-Rotate and Center Choose paper source by PDF page size Use custom paper size when needed Document: 8.5 x 11.0in Print to file Paper: 8.5 x 11.0in Print color as black 1/52 Summarize Comments OK Cancel Printing Tips Advanced


N


TO SAVE PAPER Only print the desired image by navigating to the image's page, go to File > Print and select "Current page" in the print dialog box. Repeat for each desired image. Print Range O All O Current view O Current view

Current view
 Current page
 Pages 1 - 51
Subset: All pages in range
 Reverse pages

It is a violation of Copyright law to make and distribute copies of electronic designs or artwork. Electronic designs are licensed to the original purchaser for use at one location. ©2023 OESD, LLC. All rights reserved.



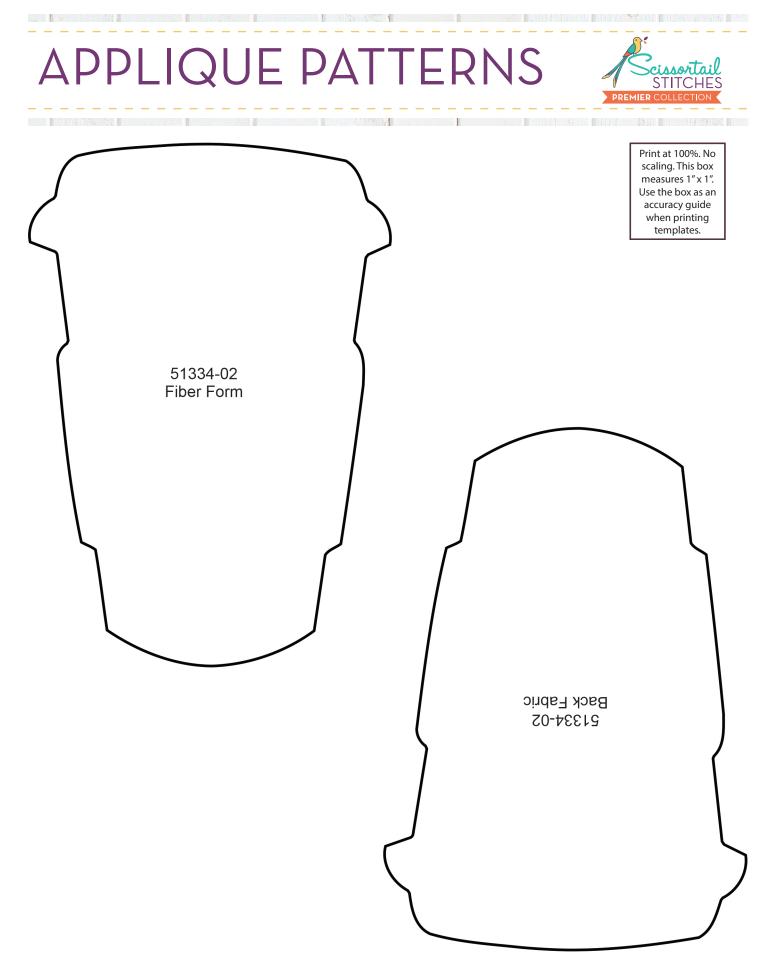

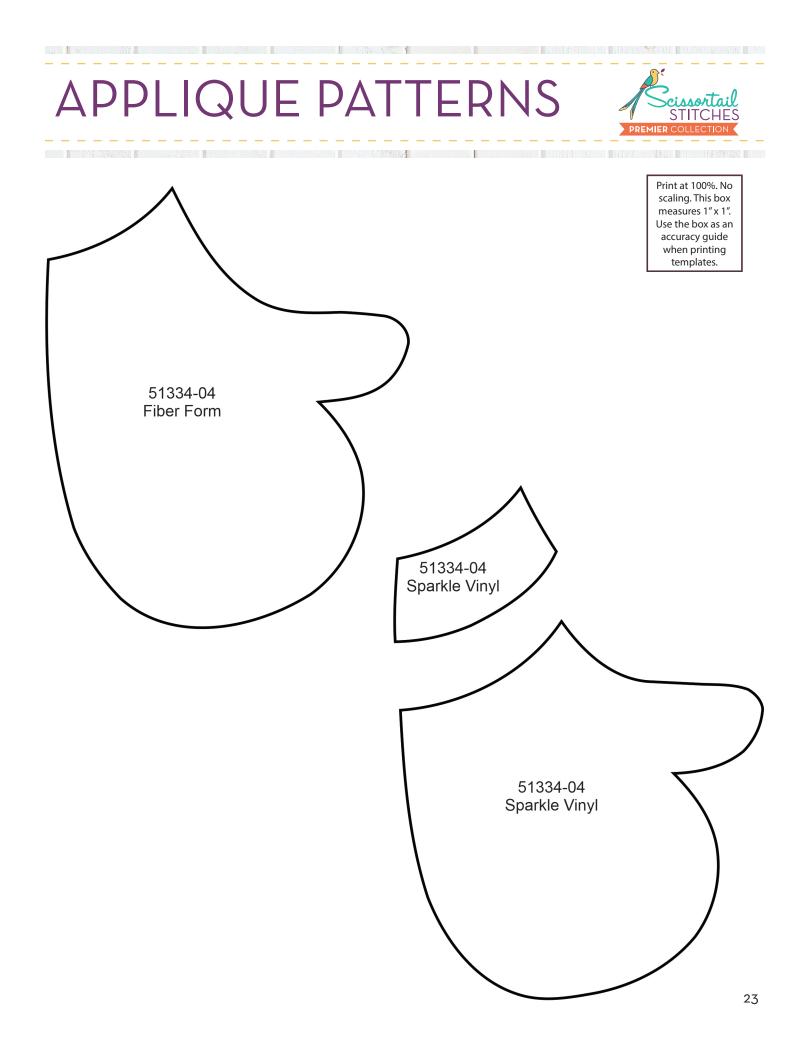


APPLIQUE PATTERNS


ALAN 033



na ostanasistematikasiste ontakanan karatan kutakan kutakanan kutakan kutakan kutakan kutakan kutakan kutakan k

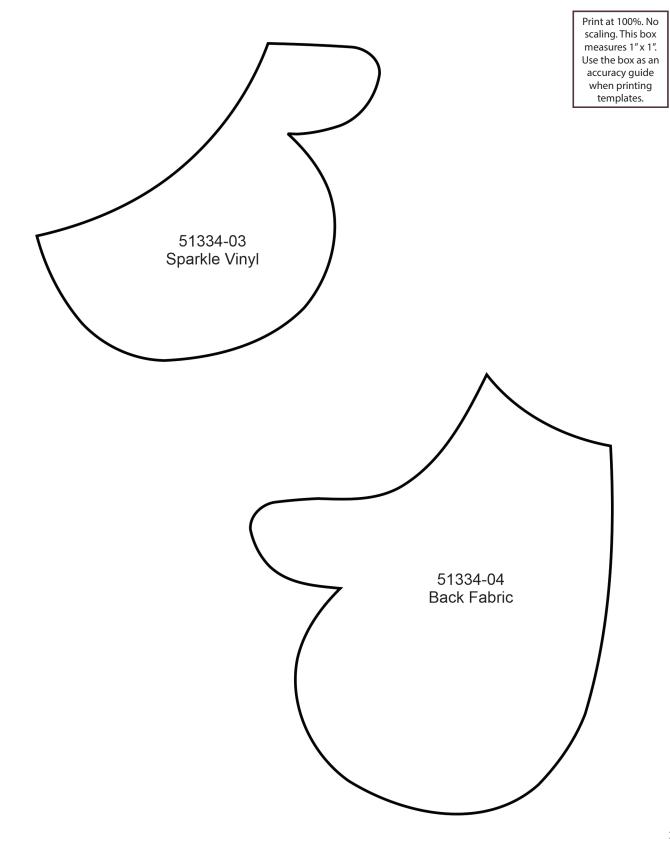



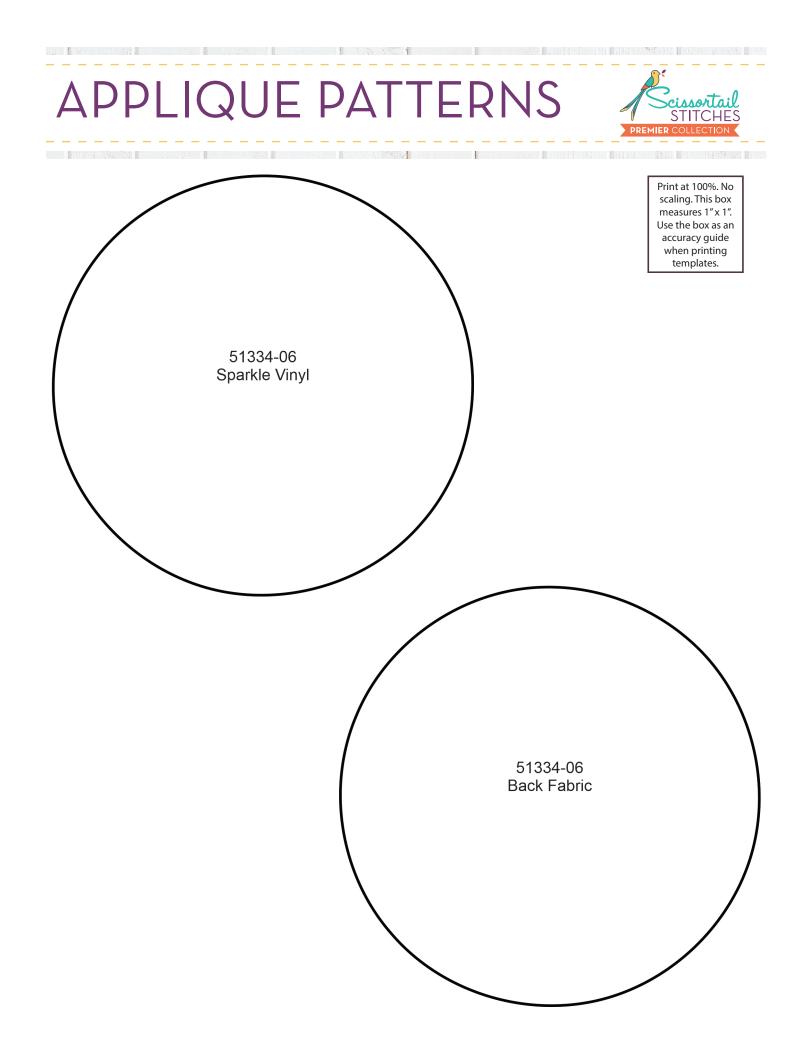


APPLIQUE PATTERNS

N




sin i shinka hushingan i na mangan da kan i hisihin di buwasi. I da ku

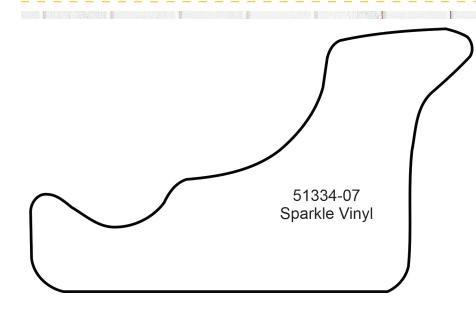



STORE DUST



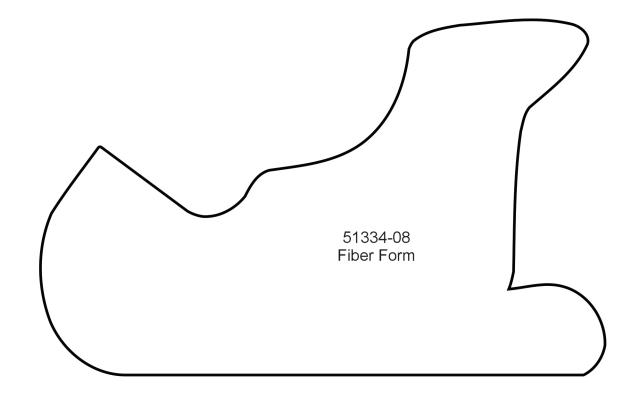

STORY DOLL N **APPLIQUE PATTERNS** ssortai STITCHE sin i shinga hushingan i na mangani wana ili hisihin ni hisihin kata Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates. 51334-08 Sparkle Vinyl

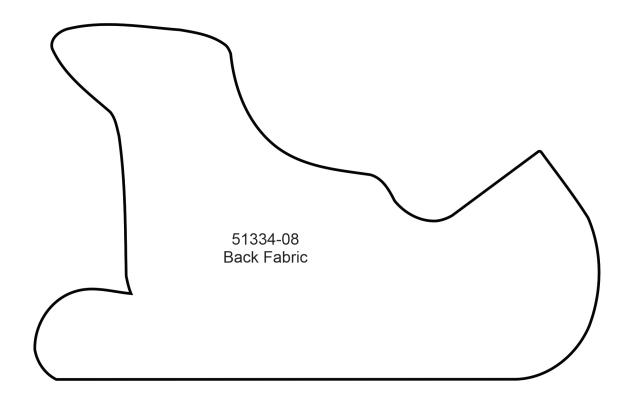

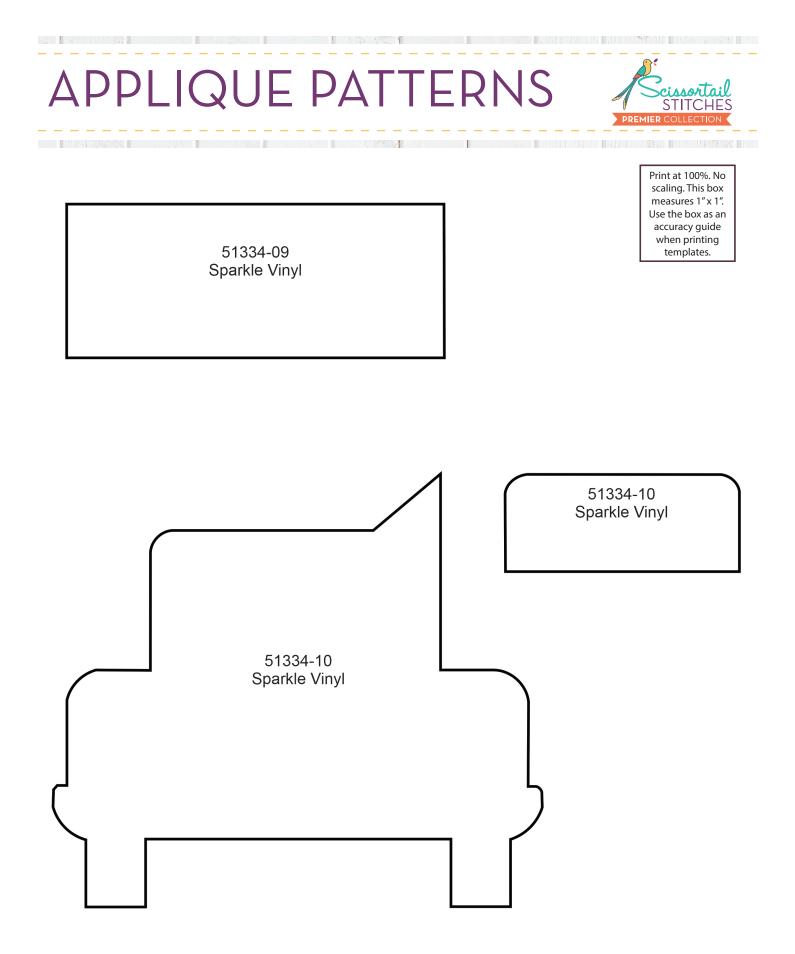


APPLIQUE PATTERNS ssortai STITCHE

CONTRACTOR OF STREET

STATE STATE

Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

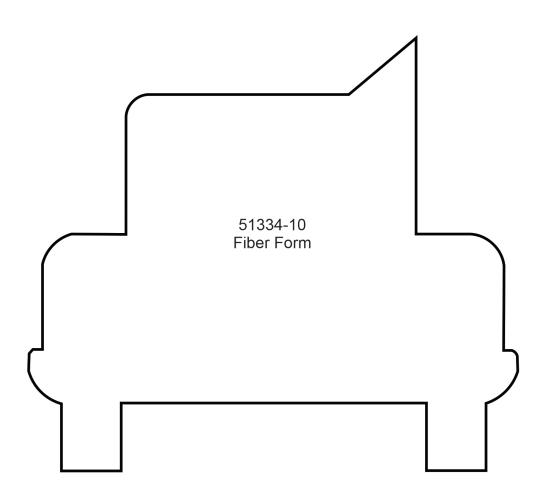

APPLIQUE PATTERNS


COLUMN STREET

100

STREET MICHAEN




Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

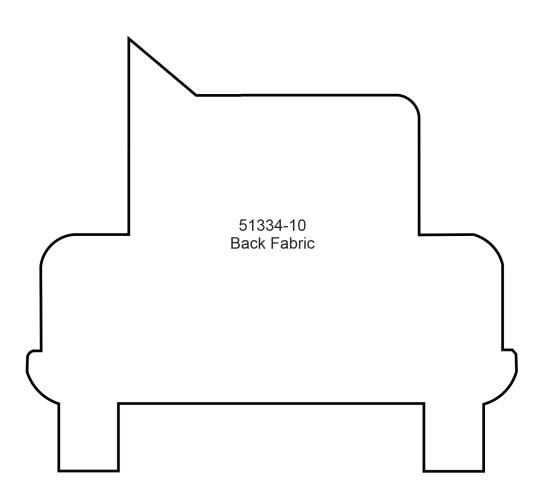



STATUTE TO ST



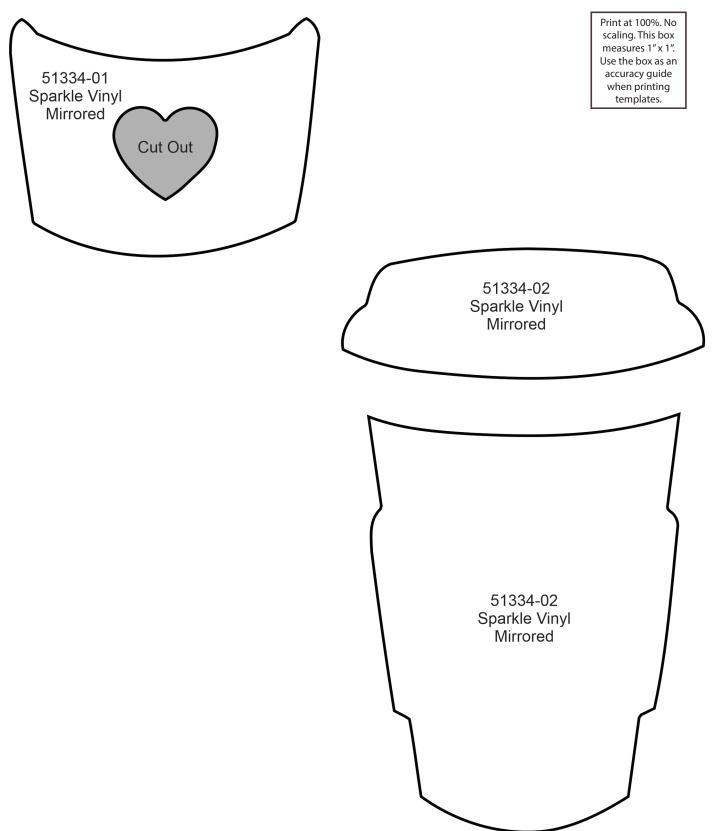

STORE DE

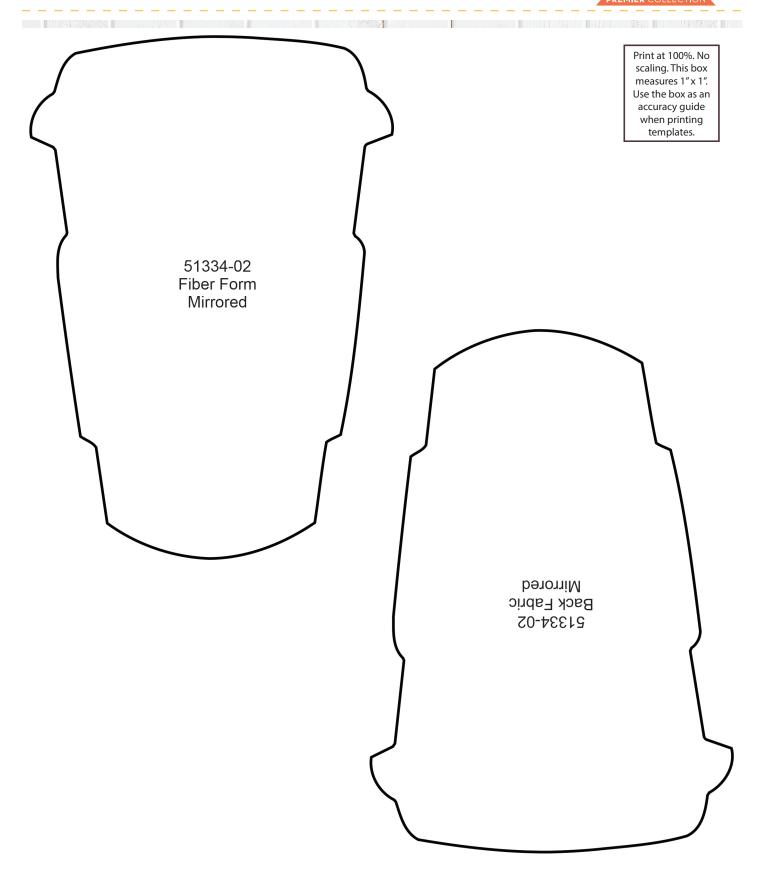

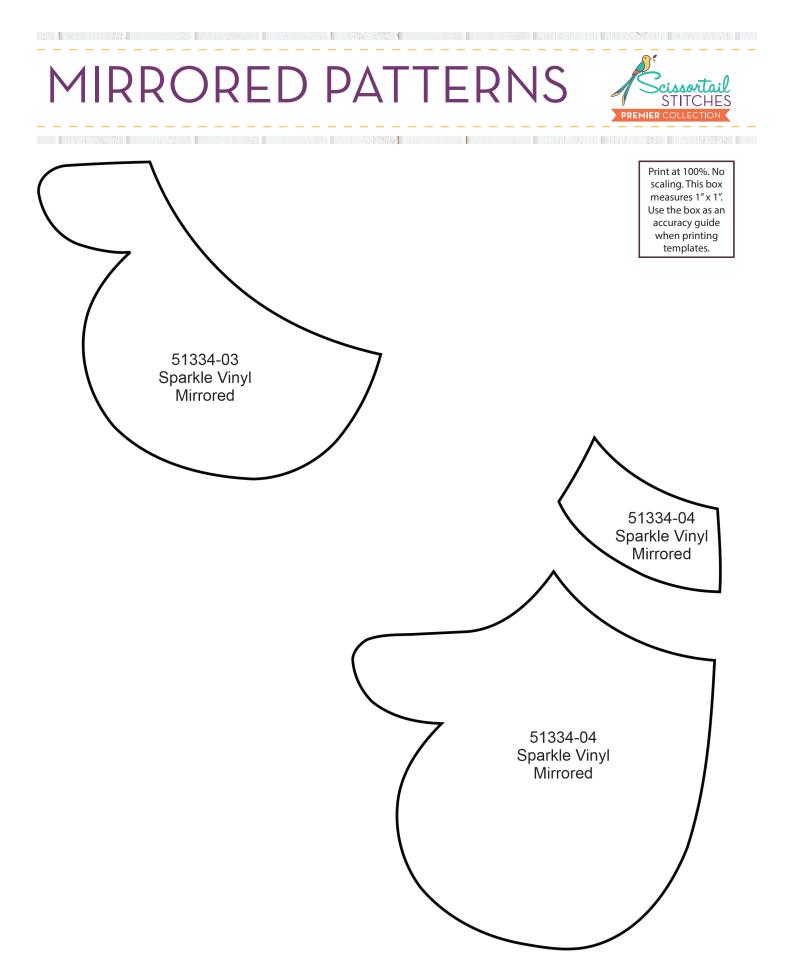



STATE DAY

N

I DUTATION SERVICES



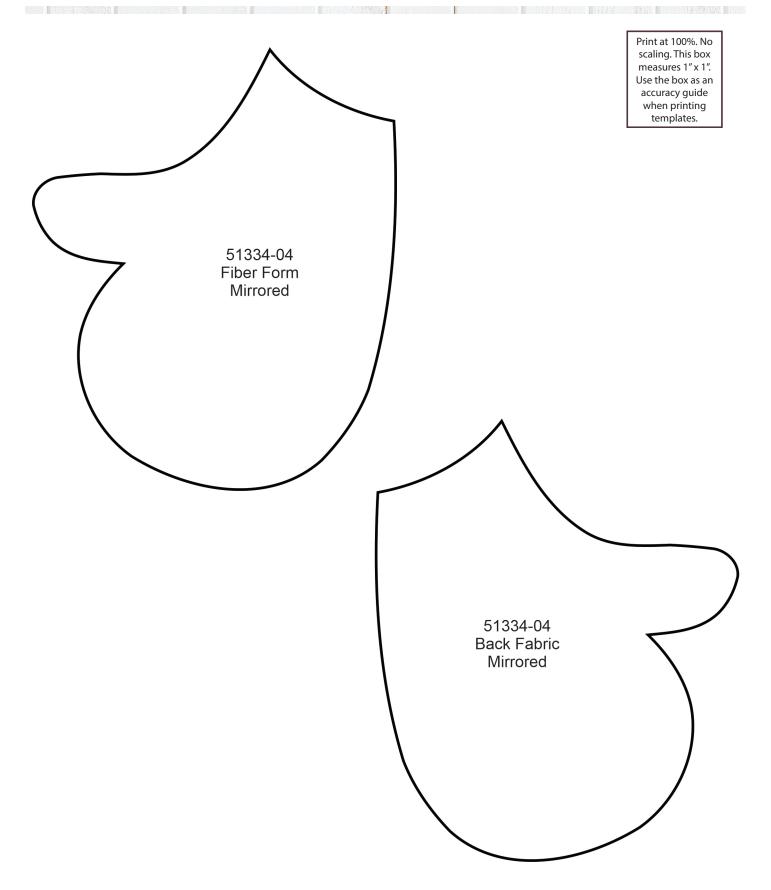


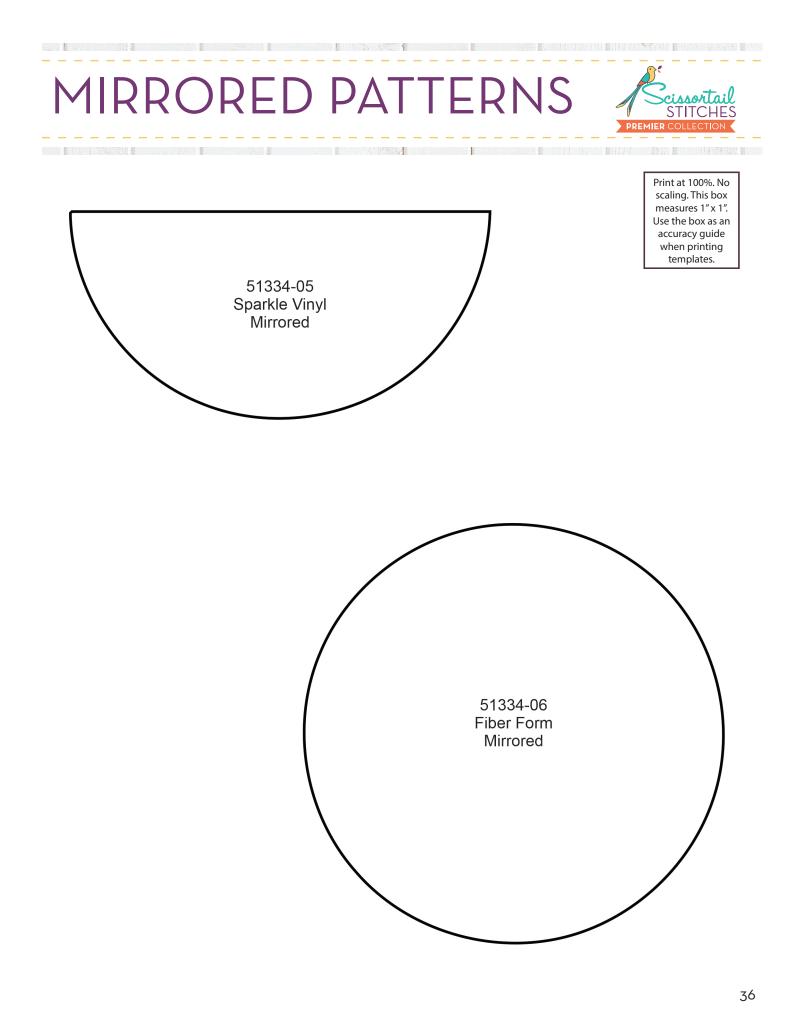




101010 NO.00




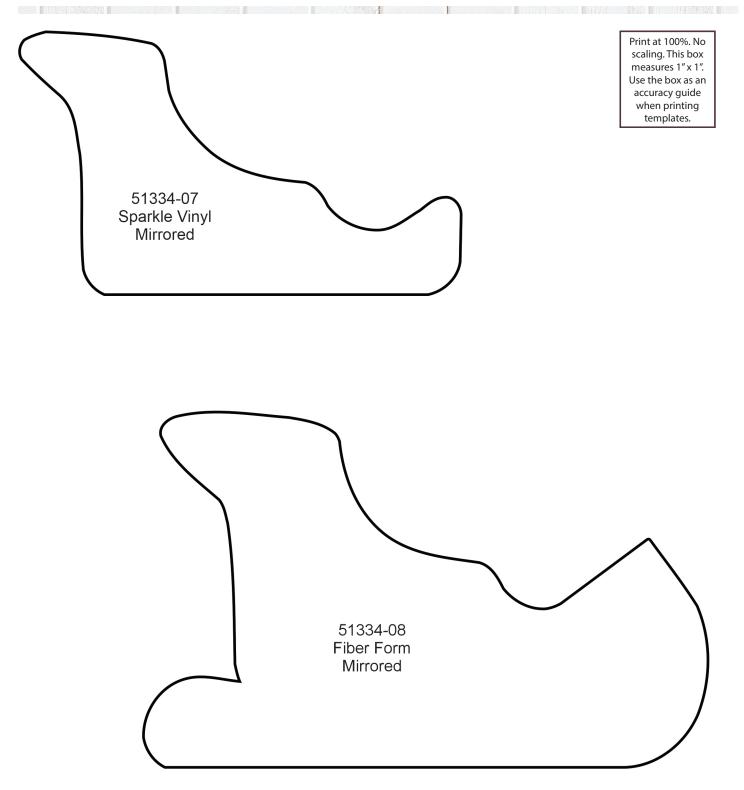

STATUTE STATE



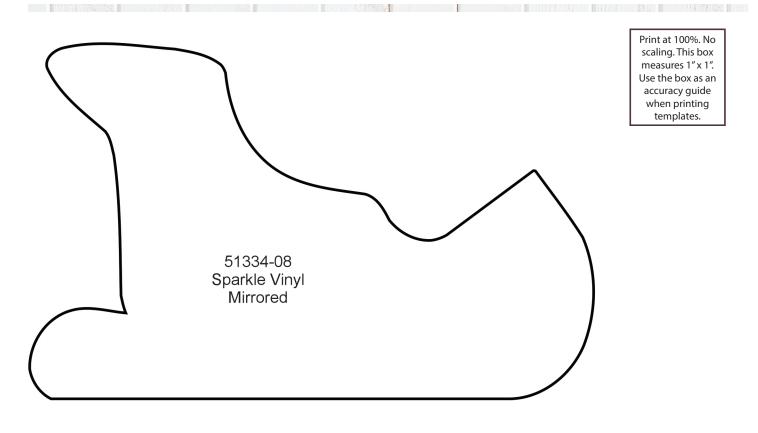

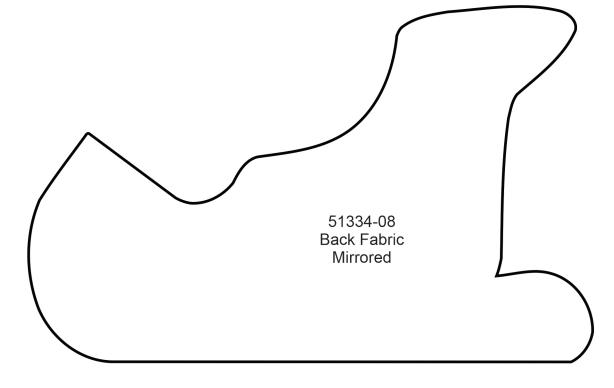


1994 - Million



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

51334-09 Sparkle Vinyl Mirrored

1012110 D3294

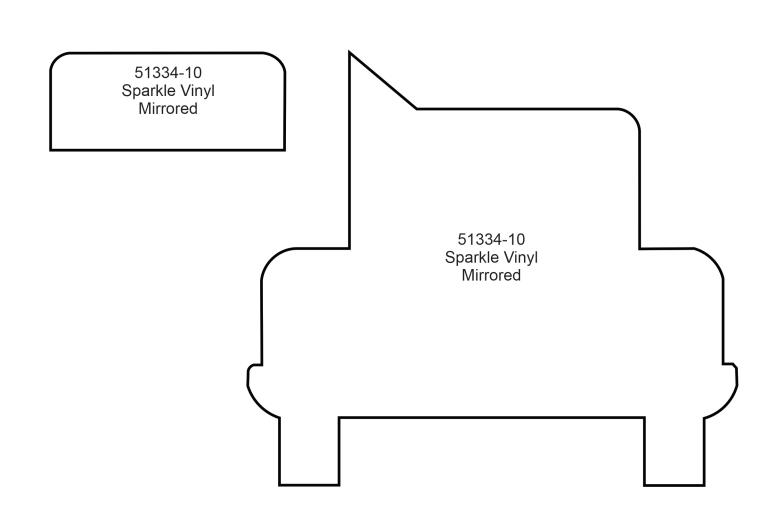


183 **1**0105

101010 NO.00

NIN CONTRACTOR



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

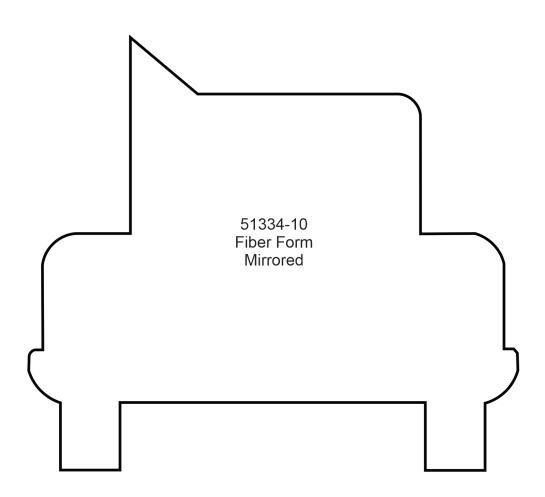

1994 - Million

NRS I



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

