



# Stitch and Turn Dog Toys

#PK50037  
4 DESIGNS

## MATERIALS



### Isacord Thread Colors

0132 Dark Pewter  
0660 Vanilla  
0870 Muslin  
1161 Straw  
1346 Cinnamon  
2051 Teaberry  
2101 Country Red  
3622 Imperial Blue

**Note: One spool of 1000 meter thread is adequate for the project unless otherwise noted.**

# MATERIALS



## Stabilizers

- OESD PolyMesh CutAway
- OESD Top Cover Permanent Topping Variety Pack
- OESD Applique Fuse and Fix
- OESD Fuse and Seal (1/4" by width of the opening)

## Fabrics/Textiles

- Assorted colors fabric - 9" x 7"

Note: Fabric sizes are estimates and may result in overage.

## Notion & Tools

- OESD Expert Embroidery Tape TearAway
- OESD Expert Point and Press Tool
- OESD Perfect Embroidery Press Cloth
- Alligator Clamps
- OESD Grippy Grid
- OESD Perfect Scoring Tool
- Embroidery Needle Sharp Size 75/11
- Fiberfill stuffing

## Isacord Thread Colors

- Per thread chart

# EMBROIDERY



## General Instructions

The Veggie Pal instructions included in the collection are general instructions. For demonstration purposes, a sample design that best demonstrates the technique is shown. Fabric and thread requirements will vary by design.

Note: Some thread colors in instructions have been changed or digitally enhanced for better visibility.


### □ Step 1

- Print the mirrored version of the required templates (100% or 1:1 ratio) onto the paper side of Applique Fuse and Fix.
- Roughly cut out each template about a 1/4" outside of the line.



### □ Step 2

- Fuse the trimmed templates to the back of the appropriate applique fabric with the paper side of the printed template up.
- Hold the iron on the template for 10-15 seconds for a secure fuse.

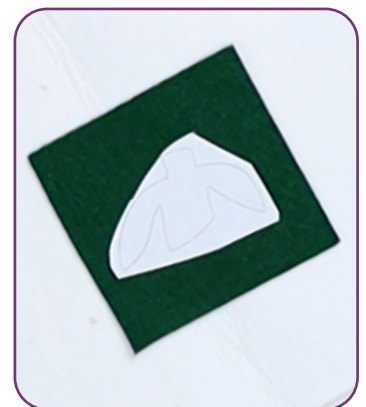

# EMBROIDERY


## □ Step 3

- Trim the prepared appliques precisely on the outer edge of the black outline.
- Set aside.




## □ Step 4

- Hoop one layer of PolyMesh CutAway.
- Load selected design into the machine.
- Design in the example is PK50006-03S.

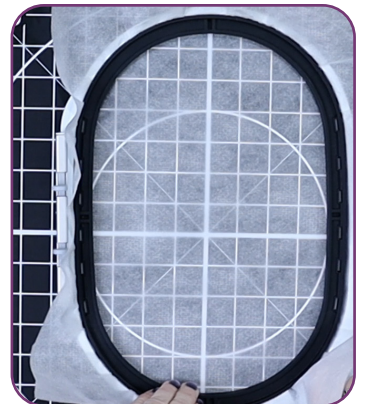

## □ Step 5


- Thread the machine per the thread chart.
- Place the hoop on the machine.
- Stitch Machine Step 1, Purple Felt Placement Stitch.

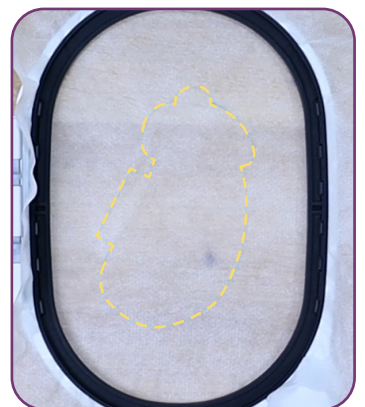

# EMBROIDERY

## □ Step 6

- Remove the hoop from the machine, but NOT the project from the hoop.
- Place the hoop on a flat surface.
- Place one piece of purple felt right side up, completely covering the placement stitch.
- Tape in place to secure.

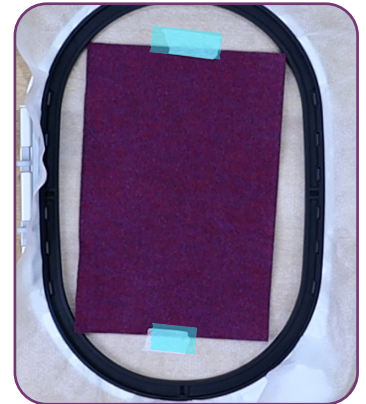

## □ Step 7

- Return the hoop to the machine.
- Stitch Machine Step 2, Tackdown.



## □ Step 8

- Stitch Machine Step 3, Green Felt Placement Stitch.
- Remove the hoop from the machine, but NOT the project from the hoop.
- Place on a flat surface.



# EMBROIDERY

## Step 9

- Remove the paper from the back of the prepared applique to expose the adhesive
- Position the applique, fabric side up, within the placement stitch, matching the cut edges with the stitching line.
- Finger press to secure.  
Note: Applique Fuse and Fix is repositionable.



## Step 10

- Return the hoop to the machine.
- Stitch Machine Step 4, Tackdown.



## Step 11

- Remove the hoop from the machine, but NOT the project from the hoop.
- Cover the face area with a top cover.
- Tape in place to secure.
- Note: Top Cover is used for a better-quality cover stitch on felt.
- Match the Top Cover to the thread color as closely as possible.
- EX. Black thread is used for the eyes; use a black Top Cover.



# EMBROIDERY

## □ Step 12

- Return the hoop to the machine and stitch Machine Steps 5-8 per the thread chart.
- STOP before Machine Stitch 9, Seam Stitch/Match Fabric.
- Remove the hoop from the machine, but NOT the project from the hoop.
- Place on a flat surface.
- Remove as much of the excess Top Cover as you can by gently tearing it away.




## □ Step 13

- Place the second piece of purple felt right side down directly over the first piece.
- Tape in place to secure.



## □ Step 14

- Return the hoop to the machine.
- Stitch Machine Step 9, Seam Stitch/Match Fabric.

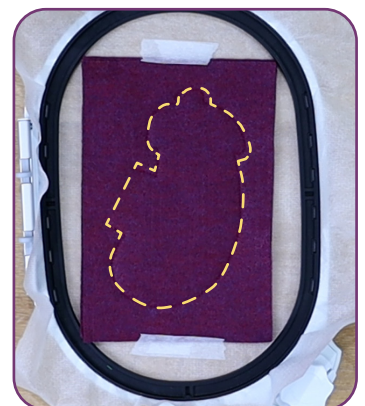

# EMBROIDERY

## Step 15

- Remove the hoop from the machine and the project from the hoop.
- Trim approximately 1/4" from the seam stitch.
- DO NOT cut off the "neck" opening.
- Trim across the opening above the vertical lines of stitching.
- Clip each inner corner of the neck to, but not through, the corner stitch.
- Clip curves as needed for easier turning.




## Step 16

- Turn the project right side out.
- Use the large end of the Expert Point and Press Tool to help push out the corners, curves, and sides.



## Step 17

- Use OESD Alligator Clamps to stuff the Veggie Pal with polyester fiberfill.  
NOTE: For a smooth project, use small amounts of fiberfill instead of large pieces. The larger pieces appear lumpier.

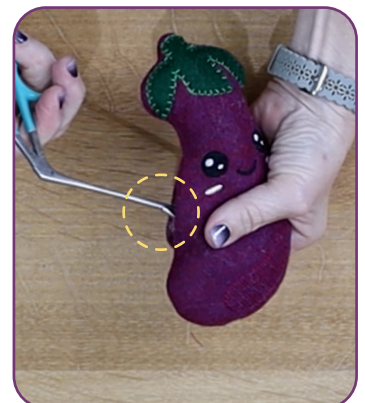



# EMBROIDERY


## □ Step 18

- Press the seam allowance into the opening.
- Place a small piece of Fuse and Seal inside and press to seal the opening, following the manufacturer's instructions.
- Let cool completely.
- The neck opening is now permanently closed.



## □ Step 19




- The project is complete. Enjoy.

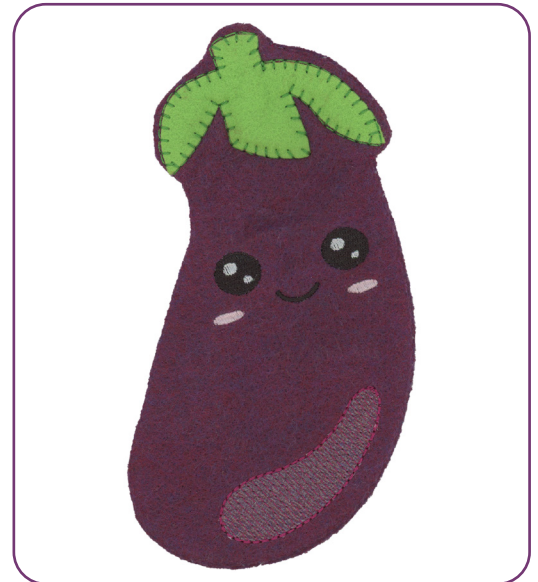

# APPLIQUE PATTERNS



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

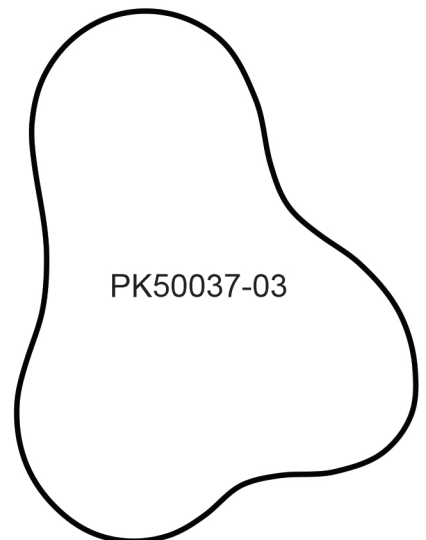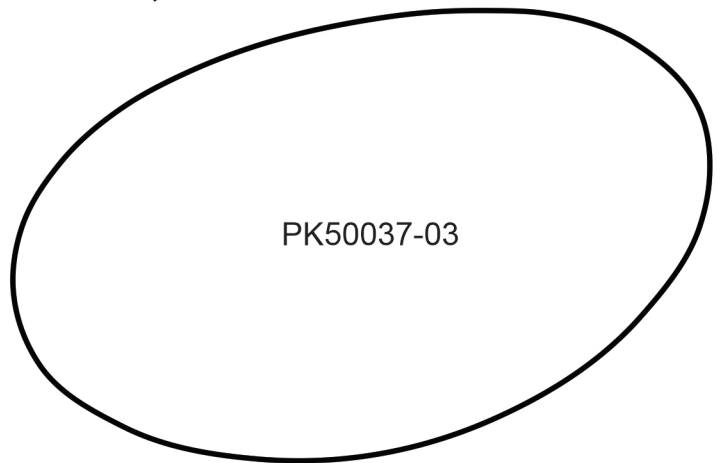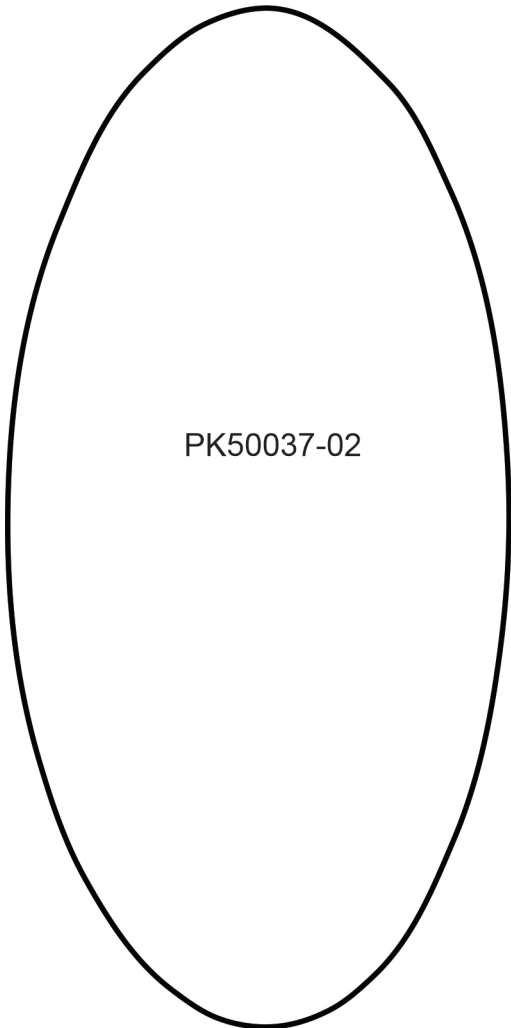

# MIRRORED PATTERNS



Print at 100%. No scaling. This box measures 1" x 1". Use the box as an accuracy guide when printing templates.

