

Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.



12506-01 Front Wall
2.39 X 5.29 in.
60.71 X 134.37 mm
9,482 St.



12506-02 Right Wall 1
2.38 X 5.28 in.
60.45 X 134.11 mm
7,595 St.



12506-03 Right Wall 2
2.38 X 5.28 in.
60.45 X 134.11 mm
7,509 St.



12506-04 Back Wall
2.38 X 5.29 in.
60.45 X 134.37 mm
8,463 St.




12506-05 Left Wall 1
2.39 X 5.29 in.
60.71 X 134.37 mm
8,029 St.



12506-06 Left Wall 2
2.38 X 5.28 in.
60.45 X 134.11 mm
7,665 St.



12506-07 Roof Slice
2.75 X 3.21 in.
69.85 X 81.53 mm
10,925 St.

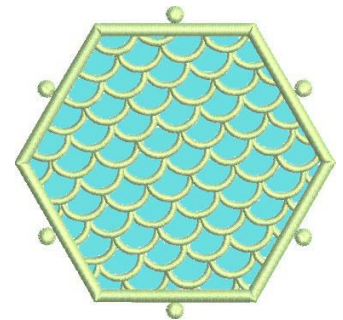


12506-08 Floor
3.93 X 3.84 in.
99.82 X 97.54 mm
12,810 St.




12506-09 Sign
3.29 X 1.77 in.
83.57 X 44.96 mm
9,331 St.



12506-10 FSL Bird
2.48 X 2.34 in.
62.99 X 59.44 mm
6,942 St.

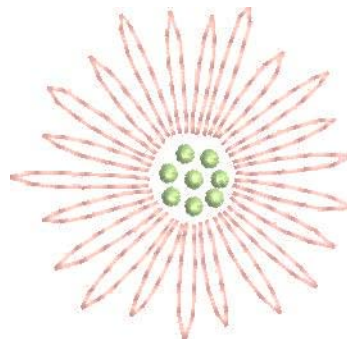

12506-11 Daisy 1
2.81 X 2.73 in.
71.37 X 69.34 mm
2,430 St.

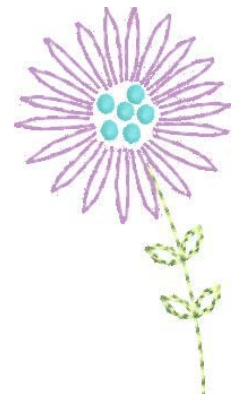

12506-12 Daisy 2
2.00 X 3.59 in.
50.80 X 91.19 mm
1,966 St.

Design contains a loose fill.

Some solid areas shown are not stitched.

L Design is larger than 5" (127 mm) in either direction.

S Design is smaller than 1.5" (38.1 mm) in either direction.

It is a violation of Copyright law to make and distribute copies of electronic designs or artwork.

Electronic designs are licensed to the original purchaser for use at one location. ©2014 OESD, LLC. All rights reserved.

Note: Some designs in this collection may have been created using unique special stitches and/or techniques. To preserve design integrity when rescaling or rotating designs in your software, always rescale or rotate designs using the handles directly on-screen.



12506-13 Daisy 3
1.45 X 1.48 in.
36.83 X 37.59 mm
1,043 St.



12506-14 Daisy 4
1.02 X 1.95 in.
25.91 X 49.53 mm
608 St.



12506-15 Daisy 5
.87 X .86 in.
22.10 X 21.84 mm
357 St.

Listings below indicate color sample, stitching order and suggested thread color number. "I" refers to Isacord thread and "T" refers to Timeless thread. Colors beginning with 20501 refer to YLI Fine Metallics, 7 refer to Yenmet Metallic, 8 refer to YLI Variations Variegated Thread and 9 refer to Isacord Multicolor Variegated.

	I	T
12506-01 Front Wall		
1. Wall Placement Stitch	6051	18118
2. Cut Line & Tackdown	6051	18118
3. Blue Petals	4240	14178
4. Pink Petals & Stamen	2155	10136
5. Lavender Petals & Stamen	3040	16118
6. Leaves, Stems & Lace	6051	18118
7. Knobs, Loops & Cover Stitch	6051	18118
12506-02 Right Wall 1		
1. Wall Placement Stitch	6051	18118
2. Cut Line & Tackdown	6051	18118
3. Petals	2155	10136
4. Stamen	4240	14178
5. Leaves & Stems	6051	18118
6. Knobs, Loops & Cover Stitch	6051	18118
12506-03 Right Wall 2		
1. Wall Placement Stitch	6051	18118
2. Cut Line & Tackdown	6051	18118
3. Lavender Petals	3040	16118
4. Blue Petals & Stamen	4240	14178
5. Pink Petals & Stamen	2155	10136
6. Leaves & Stems	6051	18118
7. Knobs, Loops & Cover Stitch	6051	18118
12506-04 Back Wall		
1. Wall Placement Stitch	6051	18118
2. Cut Line & Tackdown	6051	18118
3. Blue Petals	4240	14178
4. Lavender Petals & Stamen	3040	16118
5. Pink Petals & Stamen	2155	10136
6. Leaves & Stems	6051	18118
7. Knobs, Loops & Cover Stitch	6051	18118

	I	T
12506-05 Left Wall 1		
1. Wall Placement Stitch	6051	18118
2. Cut Line & Tackdown	6051	18118
3. Blue Petals	4240	14178
4. Lavender Stamen & Petals	3040	16118
5. Pink Stamen	2155	10136
6. Leaves & Stems	6051	18118
7. Knobs, Loops & Cover Stitch	6051	18118
12506-06 Left Wall 2		
1. Wall Placement Stitch	6051	18118
2. Cut Line & Tackdown	6051	18118
3. Pink Petals	2155	10136
4. Leaves & Stems	6051	18118
5. Lavender Petals & Stamen	3040	16118
6. Blue Petals	4240	14178
7. Knobs, loops & Cover Stitch	6051	18118
12506-07 Roof Slice		
1. Roof Placement Stitch	6051	18118
2. Cut Line & Tackdown	6051	18118
3. Lace	6051	18118
4. Knobs, Loops & Cover Stitch	6051	18118
12506-08 Floor		
1. Floor Placement Stitch	6051	18118
2. Cut Line & Tackdown	6051	18118
3. Knobs, Design & Cover Stitch	6051	18118



	I	T
12506-09 Sign		
1. Sign Placement Stitch	0870	20148
2. Cut Line & Tackdown	0870	20148
3. Word Tweet	2155	10136
4. Words Home	3040	16118
5. Lace & Cover Stitch	0870	20148
12506-10 FSL Bird		
1. Single Color Design	2155	10136
12506-11 Daisy 1		
1. Petals	2155	10136
2. Stamen	6051	18118
12506-12 Daisy 2		
1. Leaves & Stems	6051	18118
2. Petals	3040	16118
3. Stamen	4240	14178
12506-13 Daisy 3		
1. Petals	4240	14178
2. Stamen	2155	10136
12506-14 Daisy 4		
1. Petals	3040	16118
2. Stamen	2155	10136
3. Leaves & Stems	6051	18118
12506-15 Daisy 5		
1. Single Color Design	2155	10136

Design contains a loose fill.
 Some solid areas shown are not stitched.

L Design is larger than 5" (127 mm) in either direction.
S Design is smaller than 1.5" (38.1 mm) in either direction.

Cut in Place Appliqué Instructions

1. Hoop your fabric and backing.
2. Sew the pattern/placement. **PHOTO 1**
3. Place a piece of appliqué fabric over the pattern/placement so that it is completely covered.
4. Sew the trim stitch/tackdown.
5. Carefully cut away the excess appliqué fabric. **PHOTO 2**
6. Sew the remainder of the design and repeat for any remaining pieces. **PHOTO 3**



General Freestanding Lace Guidelines

Supplies:

Embroidery Thread:

- Use the same embroidery thread in the bobbin as the needle.

Needles:

- Use an Organ 80/12 Titanium needle for extended needle life.

Stabilizer:

- Use water-soluble stabilizer or film water-soluble stabilizer.

Handy Hints:

For Stiffer Lace:

- DO NOT rinse away all of the stabilizer for a “stiffer” lace. Note that the thread may appear a shade darker if stabilizer is not removed completely.
- If you happen to wash too much out, easily re-stiffen by diluting some stabilizer scraps in water and dipping the item in the solution.


For Very Soft Lace:

- Cut away excess stabilizer. Remove remaining stabilizer by rinsing under warm running water until all traces of the stabilizer are gone. **Note:** If lace should become too limp to work with, dissolve stabilizer scraps in warm water and apply to the lace.

Drying Lace:

- The lace looks best when left to dry completely. Lay lace piece with right side down to dry. This will minimize the tendency for the lace to curl. Be sure to flatten the piece out entirely and allow ample time to dry.

Diagram 1

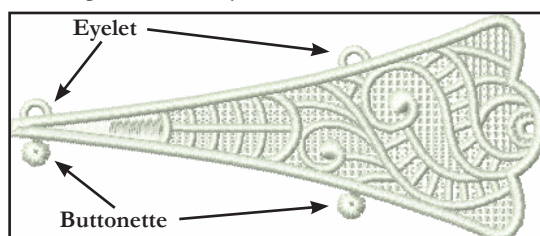

It is a violation of Copyright law to make and distribute copies of electronic designs or artwork. Electronic designs are licensed to the original purchaser for use at one location. ©2014 OESD, LLC. All rights reserved.

General Instructions

1. Hoop two layers of water-soluble stabilizer.
2. Attach the hoop to the machine and select the design of your choice.
3. Stitch the design.
4. Remove the hoop from the machine and the design from the hoop. Trim excess stabilizer from the design.
5. Rinse away remaining stabilizer and allow it to dry.

Handy Hints:

For 3D Lace Projects:

- Adhere 2 layers of heavy weight stabilizer to back of fabrics with temporary adhesive spray **before** hooping or placing down for tackdown and cut in place. This gives fabric a more rigid structure.
- Rinsing out lace with very hot water can cause wrinkles in some fabrics after it has been embroidered. To prevent this, pre-shrink cotton fabric by washing it in warm water and drying it in a dryer.
- If item becomes too limp to work with, iron the appliqué pieces on the wrong side while applying spray starch. After ironing, spray again with starch and allow to dry completely. This will stiffen the lace pieces nicely and aid in construction.
- A pair of tweezers, hemostats, stiletto or a tiny crochet hook can be extremely helpful when inserting the buttonettes into the eyelets. (Please see **Diagram 1** for explanation of “buttonette” and “eyelet”.)
- Insert the tip of the tweezers, hemostats or crochet hook into the eyelet, grasp the buttonette and pull through the eyelet. Or a stiletto could be used to push the buttonette through the eyelet.

Birdhouse - Summary

- Requires Front Wall - 12506-01
- Requires Right Wall 1 - 12506-02
- Requires Right Wall 2 - 12506-03
- Requires Back Wall - 12506-04
- Requires Left Wall 1 - 12506-05
- Requires Left Wall 2 - 12506-06
- Requires Roof Slice - 12506-07
- Requires Floor - 12506-08
- Optional* - Sign - 12506-09
- Optional* - FSL Bird 12506-10

Supplies

- Embroidery thread
- Fabric for appliqué
- Embroidery machine
- Stabilizer
- Standard 1/4" diameter dowel rod
- *Optional* - tweezers, hemostats, stiletto or a tiny crochet hook

Follow the *General Freestanding Lace Guidelines* and *Cut in Place Appliqué Instructions* and stitch the six pieces required as listed in the summary above.




Build birdhouse walls

- Attach the front wall (12506-01) to right wall 1 (12506-02) by inserting the four buttonettes along the left side of right wall 1 into the four eyelets on the right side of the front wall. **Photo 1**.
- Repeat this process working your way around the birdhouse, See **Photo 2** for wall order.
- Set aside assembled birdhouse wall structure.



Build birdhouse roof and attach to walls

- Connect all six roof slices (12506-05) together by inserting buttonettes from the left side of one piece into the eyelets from the right side of another piece. Leave the last set of buttonettes unfastened. You will have created an open circular roof. **Photo 3**
- Attach the constructed roof to the birdhouse wall structure by inserting the two buttonettes along the top of each wall section into the two eyelets located toward the bottom of each roof slice. The buttonettes will be pulled up through the roof slices.
- Complete the roof by fastening the final three buttonettes into the remaining three eyelets.

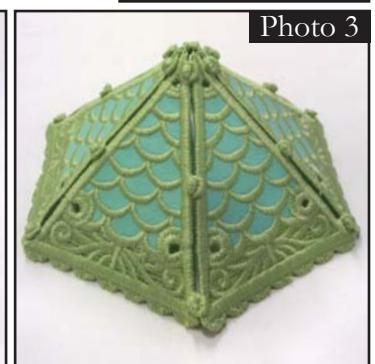

Attach birdhouse floor to walls

- Connect the floor (12506-08) to all walls by inserting the floor buttonettes through the centered eyelets

at the bottom of each wall, with appliqué facing down. **Photo 4.**

Add perch and freestanding lace bird

- Take 1/4" diameter dowel rod and cut to approximately 4" length.
- Paint the dowel rod to match colors in project or leave as natural wood.
- Insert dowel rod through small holes in the center of the front wall and back wall.
- Attach Sign (12506-09) and FSL bird (12506-10) to the dowel rod through the eyelet of each design. **Photo 5.**

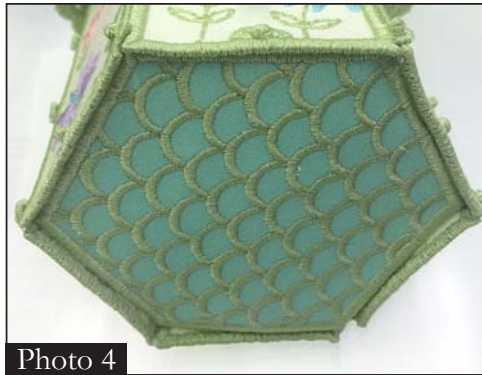


Photo 4



Photo 5

Utilize the small holes in the center top edge of the roof to hang your birdhouse with ribbon or string.

Your DaisyBirdhouse is complete!



Original Colorway

	I	T
Green:	6051	18118
Purple:	3040	16118
Blue:	4240	14178
Pink:	2155	10136
Off White:	0870	20148



Alternate Colorway

	I	T
Brown:	1115	24109
Turquoise:	3910	14199
Dark Pink:	2241	10154
Light Pink:	2152	10121
Brown:	1115	24109

Original Fabric Colors

Front Wall, Back Wall: Cream
 Left Wall 1 & Right Wall 2: Cream
 Right Wall 1 & Left Wall 2: Cream
 Roof Slice, Floor & Sign: Light Green



Alternate Fabric Colors

Front Wall, Back Wall: Burgundy
 Left Wall 1 & Right Wall 2: Brown
 Right Wall 1 & Left Wall 2: Turquoise
 Roof Slice, Floor & Sign: Turquoise